




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>F28D 13/00 // F23C 11/02, F22B 31/00, B01J 8/24</b>		A1	(11) International Publication Number: <b>WO 00/20818</b>
			(43) International Publication Date: 13 April 2000 (13.04.00)
(21) International Application Number: PCT/FI99/00797		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 29 September 1999 (29.09.99)			
(30) Priority Data: 982135 2 October 1998 (02.10.98) FI			
(71) Applicant (for all designated States except US): FOSTER WHEELER ENERGIA OY [FI/FI]; Sentnerikuja 2, FIN-00440 Helsinki (FI).			
(72) Inventor; and (75) Inventor/Applicant (for US only): HYPPÄNEN, Timo [FI/FI]; Siikakoskenpolku 10, FIN-48710 Karhula (FI).			
(74) Agent: TURUN PATENTTITOIMISTO OY; P.O. Box 99, FIN-20521 Turku (FI).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: METHOD AND APPARATUS IN A FLUIDIZED BED HEAT EXCHANGER

## (57) Abstract

A method and an apparatus in a fluidized bed heat exchanger (10) comprising a heat exchange chamber (12) having a fluidized bed (14) of solid particles, heat transfer surfaces (30), an inlet (24) and an outlet (34) arranged above the bed of solid particles. Particles are fed through the inlet onto the upper surface (28) of the bed of solid particles by a guiding channel (26). The guiding channel extends from above the upper surface of the bed of solid particles to the surface thereof or below the surface and passes the solid particles to the restricted area (28') of the surface. The outlet (34) is also formed in the area of the guiding channel to remove particles from the area delimited by the guiding channel. Uncooled particles can thus be removed from the heat exchange chamber.

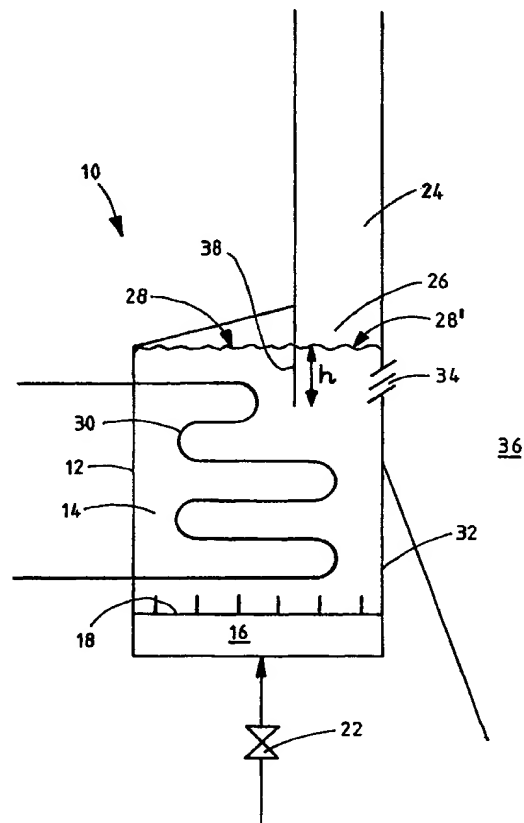



.

.

.

.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
RJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		



## METHOD AND APPARATUS IN A FLUIDIZED BED HEAT EXCHANGER

The present invention relates to a method and an apparatus in a fluidized bed heat exchanger defined in the preambles  
5 of the independent claims given below.

The present invention especially relates to a method and an apparatus, by which heat transfer may be adjusted in a fluidized bed heat exchanger, comprising a heat exchange  
10 chamber having a bed of solid particles; means for feeding fluidization gas into the heat exchange chamber; heat transfer surfaces in contact with the bed of solid particles; an inlet arranged in the top portion of the heat exchange chamber above the upper surface of the bed  
15 of solid particles; and a first outlet for removing solid particles from the heat exchange chamber. The method thus typically comprises the following steps of:

- (a) solid particles are fed through the inlet to the upper surface of the bed of solid particles in the heat exchange chamber;  
20
- (b) the bed of solid particles in the heat exchange chamber is fluidized by fluidization gas;
- (c) heat is transferred by the heat transfer surfaces from the fluidized bed of solid particles; and
- 25 (d) solid particles are removed from the heat exchange chamber through the first outlet.

Fluidized bed heat exchangers are generally used in various pressurized and atmospheric fluidized bed reactor  
30 systems, for example, in different combustion and heat transfer processes and chemical and metallurgic processes. Heat typically generated by combustion or other exothermic processes is recovered from solid particles by utilizing heat transfer surfaces. The heat transfer surfaces conduct  
35 the recovered heat to a medium, such as water or steam, which transfers the heat out of the reactor.



Heat transfer surfaces may be arranged in different parts of the reactor system, for example in special heat exchange chambers, which may be a part of the reaction chamber, a separate chamber in connection with the reaction chamber, or as in circulating fluidized bed reactors, a part of the circulation system of solid particles.

In many applications of fluidized bed reactors, for example in steam boilers, it is important to be able to adjust the heat transfer continuously and accurately within a wide control range. The reason for the adjustment need may be a changing demand for steam to be produced or a deviation in the fuel quality or in the feed of the fuel or some other abnormality in the system. It may also be necessary to adjust the system to a right operational state. Further requirements for the adjustment of heat transfer in the steam boilers result from the fact that heat is generally recovered at several stages, i.e. in evaporators, superheaters, economizers and reheaters, which may need individual adjustment.

The purpose of the adjustment of heat transfer efficiency in a fluidized bed reactor with respect to the processes is to maintain an optimum operational state in view of emissions and efficiency in the reactor. Often this means that the temperature of the reactor should continue to be constant even in such conditions, in which the heat transfer efficiency and the feed volumes of the fuel fluctuate.

When designing a heat exchange chamber, the most important targets are a simple structure, continuous adjustability within a wide adjustment range and minor space requirements.



2

2

.

.



A way to adjust the heat transfer efficiency of a fluidized bed heat exchanger is to change the volume of the fluidized bed material in the heat exchange chamber so that a varying portion of the heat transfer surfaces is covered by solid particles. Such a structure is disclosed, for example, in US patent 4,813,479. In the disclosed arrangement, however, an additional flow channel and an adjustment valve are required, which makes the system more complicated and increases the costs. Further, when changing the height of the bed, part of the heat transfer surfaces may be exposed to considerable erosion.

US patent 5,140,950 discloses an arrangement where the circulation flow of hot solid particles in a circulating fluidized bed reactor is divided by a number of compartments and channels into two separate chambers, only one of which includes heat transfer surfaces. By changing the division ratio of the solid particles flowing through the various chambers, it is possible to vary the heat transfer efficiency of the heat exchanger. The disclosed arrangement is, however, complicated and - in view of space consumption - disadvantageous.

A bubbling fluidized bed is usually maintained in the heat exchange chamber where the speed of the fluidization gas may be, when using bed material with small particle size, for example, 0,1 - 0,5 m/s. The heat transfer efficiency of the fluidized bed heat exchanger may be varied to some extent by changing the speed of the fluidization gas. This is due to the fact that the solid particles move more vividly at high speeds of the fluidization gas than at low speeds, whereby the hot particles spread at high speeds efficiently throughout the whole area of the heat exchange chamber. At high speeds, no separate cooled layers are allowed to be formed in the close proximity of the heat transfer surfaces to decrease the heat transfer, nor will the hot particle flows entering the heat exchanger be



passed directly from the inlet of the heat exchange chamber to the outlet without mixing with the particles in chamber.

5 US patent 5,425,412 discloses an arrangement in a circulating fluidized bed reactor, in which the heat exchange chamber includes separate areas for transferring particles and for heat transfer respectively. Heat transfer efficiency is adjusted by changing the moving  
10 intensity of the particles close to the heat transfer surfaces and the mixing rate of the material by utilizing the fluidization gas velocities of different areas. By changing the mixing rate of the material the relation between the hot particles newly flown to the chamber and  
15 the particles already cooled in the exiting particle flow is varied. In different situations particles may be discharged through an overflow opening in the bed surface and/or through an outlet in the lower portion of the chamber. The adjustment range of the heat transfer  
20 efficiency in this kind of a heat exchange chamber may, however, remain rather limited, as in order to avoid agglomeration and overheating of the bed due to possible after-burning the bed of solid particles must be maintained continuously fluidized, whereby the mixing rate  
25 is always fairly high. Further, due to the use of a separate transfer area the space utilization is not optimal, since a considerable part of the heat exchange chamber is not in efficient use with respect to the heat transfer.

30

It is an object of the present invention to provide an improved method and apparatus, in which the above-mentioned problems and defects of the prior art methods and apparatuses are minimized.

35

It is a more specific object of the invention to provide an improved method and apparatus for easy adjustment of



the heat transfer efficiency of a fluidized bed heat exchanger within a wide efficiency range.

5 It is still a further object of the present invention to provide a durable and simple, cost-reasonable and space-saving fluidized bed heat exchanger.

10 Toward the fulfillment of these objects, the method and apparatus in accordance with the present invention is characterized by what is disclosed below in the characterizing parts of the independent claims.

15 The basic idea of the method and apparatus in accordance with the present invention is to be able to restrict the mixing of hot solid particles flowing into the fluidized bed heat exchanger with the bed of solid particles consisting of the solid particles that have come into contact with heat transfer surfaces and/or have otherwise been already cooled. The purpose is thus to be able to  
20 either partly or even completely prevent the mixing of hot solid particles with the bed of solid particles.

25 The mixing of hot solid particles with the bed of solid particles is restricted by a guiding channel arranged in the fluidized bed heat exchanger to extend from above the surface of the bed of solid particles to the bed of solid particles, and by arranging a first outlet in the area defined by said guiding channel. Hot particles fed through an inlet into the heat exchange chamber may thus be passed  
30 by the guiding channel to a particular area substantially defined by the guiding channel on the upper surface of the bed of solid particles. Moreover, when the first outlet of the heat exchange chamber is arranged in the area defined by the guiding channel, it is possible to remove hot solid  
35 particles directly from this area, for example, as an overflow from the upper surface of the solid particle bed or from below the surface through an adjustable outlet or



opening without allowing the particles to be removed to come into contact with the cooled solid particles.

5 In a typical arrangement in accordance with the invention a guiding channel is arranged in the top portion of the heat exchange chamber so that the guiding channel extends from the inlet to the bed of solid particles, to the bed surface or over a short distance below the surface. In some cases the desired guiding of the solid particles is  
10 accomplished also by a guiding channel, the lower end of which does not quite reach this surface. Typically the location of the first outlet determines the distance the lower end of the guiding channel is to extend inside the bed, if at all. The guiding channel is preferably formed  
15 of an intermediate wall extending from the top portion of the heat exchange chamber to the bed of solid particles, said intermediate wall defining the guiding channel between a wall of the heat exchange chamber and itself.

20 When the speed of the fluidization gas in the heat exchange chamber is low and the mixing of particles in the heat exchange chamber and thus also in the area of the guiding channel is minimal or even virtually nonexistent, it is possible to remove the majority or even all the hot  
25 particles flowing into the heat exchanger through the first outlet without substantially transferring any heat to the bed and therethrough to the heat transfer surfaces. The heat transfer efficiency of the heat exchanger is thereby minimal.

30 The heat transfer efficiency may be increased by raising the velocity of the fluidization gas thus intensifying the mixing of particles also within the area of the guiding channel, whereby at least a portion of the hot solid  
35 particles or even all of them release heat to the bed and thereby to the heat transfer surfaces as well. In this case cooled solid particles are removed from the heat





exchanger through the first outlet or through a second outlet arranged in the lower part of the bed.

According to the invention, it is thus possible to  
5 restrict the mixing of the cooled solid particles in the bed and the hot solid particles to be removed through the first outlet by passing the hot solid particles to a restricted area on the upper surface of the solid particle bed, from where part of the solid particles may be removed  
10 from the heat exchanger in an uncooled state. Thus it is possible to prevent or at least substantially restrict the heat transfer from said specified portion of the solid particles to the solid particle bed and further to the heat transfer surfaces. By utilizing the arrangement  
15 according to the present invention, it is possible to decrease the bed temperature and the amount of heat energy to be recovered by the heat transfer surfaces. Thus it is possible, by passing a portion of the particles in an uncooled state out of the heat exchanger, to decrease the  
20 smallest possible heat transfer efficiency acquired by each incoming flow of hot particles.

In the arrangement in accordance with the present invention, it is possible to arrange a second outlet in  
25 the heat exchange chamber; for example, in the lower portion of the chamber, the solid particle flow through which second outlet can be controlled. Thus it is possible, when producing a high heat transfer efficiency, to let the whole incoming particle flow exit through the  
30 second outlet, whereby the means restricting the mixing in the area of the first outlet do not substantially affect to the mixing rate. Thereby the highest possible heat transfer efficiency does not change either.

35 It is typical of the method in accordance with the present invention that the particle flow entering the heat exchanger is passed to the surface of the solid particle



bed by means extending slightly below the surface to an area defined by said means. The criterion for selecting this restricted area is its connection to the first outlet. The cross-sectional surface area of the restricted area is at the level of the first outlet generally substantially smaller than the average cross-sectional surface area of the particle bed in the heat exchange chamber. The cross-sectional surface area defined by the means is preferably at the level of the lower surface of the first outlet at most 30 %, preferably at most 10 %, of the average cross-sectional area of the particle bed in the heat exchange chamber.

The means restricting the mixing are typically arranged in such a way that they penetrate only over a short distance into the upper part of the bed of solid particles so that the channel or gap formed by them in the bed, where typically no heat transfer surfaces are arranged, would not produce any major waste space in the bed in view of the heat transfer. Thus the means restricting the mixing preferably extend into the bed over a distance which is at most 30 %, most preferably at most 20 %, of the depth of the bed. Typically, the restricting means extend about 10-50 cm, most typically approximately 20-30 cm into the bed.

The invention is applied according to a first preferred embodiment of the present invention to a circulating fluidized bed reactor or boiler, in which the heat exchanger in accordance with the present invention is arranged between the furnace and the return duct of the particle separator in the solids circulation of the reactors, i.e. the tube, through which particles are returned from the particle separator to the furnace of the reactor. The inlet of the heat exchanger is connected to the return duct and the outlet, for example an overflow opening, to the furnace. A first portion of the particles is preferably passed from the return duct in a



substantially uncooled state as an overflow to the furnace. A second portion of the particles is passed to the solids bed in the heat exchange chamber where heat is transferred from the particles to the heat transfer surfaces before the particles are returned to the furnace. The portion to be removed from the circulation as an overflow, possibly varying from 0 to 100 %, varies for example according to the load of the boiler, fuel and volume of the circulation flow.

10

According to another preferred embodiment, it is possible to apply the invention to a circulating fluidized bed reactor or bubbling bed reactor, in which solids are passed directly to a heat exchanger from a reaction chamber/furnace. In this case the heat exchanger is preferably arranged immediately outside the reaction chamber of the reactor and the heat exchanger and the reaction chamber preferably share a common wall with openings arranged therein forming an inlet for introducing particles into the heat exchange chamber, and an overflow conduit for immediate return of the particles as an overflow to the reaction chamber. These openings may be very close to each other. One and the same opening may in some cases act even in both directions, i.e. alternate in acting as an inlet in one direction and as an overflow opening in another direction. On the other hand, in some cases the upper part of the opening may operate as an inlet and the lower part as an outlet in one and the same opening.

30

When a fluidized bed heat exchanger is located directly in communication with the reaction chamber of a fluidized bed reactor, often the openings have to be arranged in such a way that material is gathered from a wide area to produce a sufficient material flow. In this case it is particularly important that the incoming material is passed to a small area on the upper surface in the

35



fluidized bed and it is not allowed to spread throughout this wide surface, where it would inevitably mix with the material which is already in the fluidized bed. By restricting the incoming particle flow to a small area the unnecessary mixing of the material to be removed as an overflow with the rest of the fluidized bed material is restricted as well.

A second outlet for the cooled particles of the heat exchanger is preferably formed at the bottom of the heat exchange chamber, from where particles are passed in a manner known per se, for example, to the furnace. On the other hand, in the above mentioned embodiments the discharge of cooled particles may be arranged to take place through a lifting channel arranged between the heat exchange chamber and the furnace. The bottom of the lifting channel communicates with an outlet in the lower portion of the heat exchange chamber and it preferably shares a common wall with the furnace. Particles are passed from the lifting channel, for example, as an overflow to the furnace.

The arrangement in accordance with the present invention is preferably realized in such a way that the heat exchange chamber has only one continuous fluidized bed of solid particles. Above the fluidized bed the heat exchange chamber is provided with means, e.g. an intermediate plate or a baffle, substantially restricting the spreading of the solid particles introduced through the inlet on the bed of solid particles thus restricting their mixing with the fluidized bed of solid particles as well. When using low fluidization gas velocities, only a first portion of the particles fed to the small area is mainly mixed with the bed of solid particles. The portion corresponds to the amount of particles flowing from the inlet through the heat exchange chamber to the outlet in the lower portion of the heat exchange chamber.





When the demand for heat transfer efficiency is small, the particle flow flowing through the heat exchanger, in other words the particle flow coming in and flowing out, is allowed to pass only through a restricted area of the upper surface of the solid particle bed, whereby the solid particle exchange between the exiting flow and the bed of solid particles is small. Particles, which have not yet had time to settle in the area of efficient mixing of the bed and thus not yet released any heat to the solids bed, may be readily removed as an overflow from the thick layer of hot particles formed in a small area.

In the arrangement in accordance with the invention, only a material flow necessary for the heat transfer is mixed with the bed of solid particles in the heat exchange chamber, the excess returning in a hot state from the upper surface of the bed to the reaction chamber and thus without substantially mixing with the fluidized bed in the heat exchange chamber.

In a heat exchange chamber in accordance with the invention, an efficient and wide-ranging adjustment of heat transfer may be realized simply by adjusting the velocity of the fluidization gas, and if necessary, by further adjusting the discharge of solid particles through a second outlet. By intensifying the particle flow through the second outlet, the amount of uncooled particles flowing through the first outlet is decreased and the amount of particles coming into communication with the heat transfer surfaces is increased. Respectively, by decreasing the particle flow through the second outlet, the immediate discharge of hot particles from the heat exchanger through the overflow opening is increased.

In the arrangement in accordance with the invention, it is not necessary to divide the heat exchanger by intermediate



walls into separate beds of solid particles provided with an individual fluidization.

The invention is described below more closely with reference to the accompanying drawings, in which

- Fig. 1 schematically illustrates a vertical, cross-sectional view of a fluidized bed heat exchanger in accordance with the invention;
- 10 Fig. 2 schematically illustrates a cross-sectional view of a circulating fluidized bed boiler provided with a heat exchanger in accordance with the first embodiment of the invention;
- 15 Fig. 3 schematically illustrates an enlargement of Fig. 2 at the overflow opening and a first exemplary embodiment of the invention, in which the heat exchanger in accordance with the invention is connected to the return duct in the separator of the circulating fluidized bed boiler; and
- 20 Fig. 4 schematically illustrates a cross-sectional view of a heat exchanger in accordance with a second embodiment of the invention.

Fig. 1 schematically illustrates a simple heat exchanger 25 10, in the heat exchange chamber 12 of which a slow fluidized bed 14 comprising hot solid particles is maintained by feeding fluidization gas into it from a wind box 16 through a grid 18. Heat transfer surfaces 30 are arranged in the fluidized bed for the recovery of heat from the fluidized bed. The flow of the incoming fluidization gas from the wind box through the grid 18 may be adjusted by a valve 22, for example, to control the quantity of heat transferring to the heat transfer surfaces.

35

The top portion of the heat exchange chamber 12 above the fluidized bed 14 is provided with an inlet 24, from which



hot solid particles flow through a guiding channel 26 on the surface 28 of the fluidized bed 14.

Heat is recovered from the hot particles entering the fluidized bed in the heat exchange chamber 12 by transferring the heat energy of the hot solid particles to a medium, usually steam or water, contained in the heat transfer surfaces 30. The top portion of the heat exchange chamber 12, immediately below the surface 28 of the fluidized bed 14 is provided with an outlet 34 in the wall 32 of the heat exchange chamber, through which solid particles are removed from the heat exchange chamber to the adjacent space 36 typically being, for example, a furnace. The outlet 34 is preferably a so-called gill-seal type block provided with a gas lock disclosed in the Finnish patent application FI 952193 of the applicant. A separate feed for fluidization air possibly required by the "gill-seal" type outlet is not illustrated in Fig. 1. The outlet may also be another kind of a conduit or an opening, the opening extent and flow-through of which is adjustable.

Continuous fluidization must be often maintained in the particle bed 14 to prevent agglomeration of the bed and local overheating. To prevent the hot solid particles flowing through the inlet 24 to the upper surface of the bed from mixing rapidly with the bed 14 due to fluidization, a baffle or an intermediate wall 38 considerably restricting said mixing is arranged in the heat exchange chamber. The intermediate wall 38 forms one of the guiding channel 26 walls.

The intermediate wall 38 arranged in the top portion of heat exchange chamber 12 between the inlet 24 and the upper surface 28 of the fluidized bed 14 passes the hot solid particles through the inlet 24 toward an area 28' on the upper surface 28 of the fluidized bed defined by the



intermediate wall 38 and the wall 32 of the heat exchange chamber. The intermediate wall 38 and the wall 32 of the heat exchange chamber 12 form a guiding channel 26 extending over and partly into the fluidized bed. The intermediate wall 38 extends lower than the lower edge of the outlet and at the guiding channel prevents the free movement of the material entering the heat exchange chamber within the surface 28 area of the fluidized bed 14. On the other hand, in order to avoid a major waste space, the guiding channel 26 formed by the wall 32 of the heat exchange chamber 12 and the intermediate wall 38 may not be too long. In the example of Fig. 1, the length of the guiding channel portion in the solid particle bed is less than 30 % of the depth of the bed. The intermediate wall 38 extends over a distance "h" into the fluidized bed, the distance typically being 10-50 cm.

The cross-sectional area  $A_1$  of the area 28' restricted by the guiding channel from the surface 28 of the fluidized bed is at most 30 % of the average cross-sectional area  $A_2$  of the fluidized bed. Thus the solid particles flowing through the inlet 24 to the fluidized bed, which particles in a heat exchange chamber not equipped with intermediate walls would spread throughout the entire upper surface of the fluidized bed, are packed within the area defined by the guiding channel 26 in the arrangement in accordance with the invention.

When low heat transfer efficiency is desired using a heat exchange chamber in accordance with Fig. 1, a fluidization gas velocity as low as possible has to be used, i.e. a so-called minimum fluidization, by which solid particles still move relative to each other. If the intermediate wall 38 did not exist, the hot solid particles entering through the inlet 24 would be allowed to spread throughout the entire surface 28 of the solid particle bed, whereby they would efficiently mix with the bed 14 of solid





particles regardless of the low velocity of the fluidization gas. In the arrangement of Fig. 1 in accordance with the invention the intermediate wall 38 passes the hot solid particles entering through the inlet to the restricted area 28' on the upper surface of the solid particle bed. When using a low fluidization gas velocity, the mixing of the hot solid particles forced to the restricted bed area 28' is slow or practically no mixing takes place at all. As the outlet 34 is in the area of the solid particle bed defined by the guiding channel 26, hot solid particles newly entered the heat exchange chamber mainly through the inlet 24 and not yet being mixed with the particles in the bed, are discharged from the heat exchange chamber 12 through the outlet 34. Since no substantial quantities of hot particles enter the bed, the temperature of the bed 14 remains substantially low and the heat transfer minor.

On the other hand, if high heat transfer efficiency is desired using a heat exchange chamber in accordance with Fig. 1, a high fluidization gas velocity has to be used. In this case the entire solid particle bed is in a very intensive inner movement, whereby also the particles entering through the inlet 24 mix rapidly with the solid particle bed 14 in the heat exchange chamber regardless of the intermediate wall 38. Thus almost the entire bed of solid particles, including most of the bed portion defined by the guiding channel 26, is substantially at the same temperature and its heat transfer efficiency is maximal.

According to the above description, the intermediate wall 38 diminishes the lowest possible heat transfer efficiency available in the heat exchange chamber 12, but it does not substantially affect the highest possible heat transfer efficiency available. Thus, the intermediate wall restricting the mixing makes the adjustment range of the heat transfer in the heat exchange chamber considerably



wider, which is of great importance in many applications of heat exchange chambers.

Fig. 2 illustrates a heat exchanger connected to a circulating fluidized bed boiler in accordance with the invention. In Fig. 2 the same reference numbers are used, as in Fig.1, wherever possible.

Fig. 2 thus illustrates a circulating fluidized bed boiler 40, comprising a furnace 36, a particle separator 42, a gas outlet pipe 44, and a return duct 46 for solid particles including a gas lock 48. A fast fluidized bed comprising hot solid particles is maintained in the furnace 36 by feeding fluidization gas to the bed from a wind box in a manner known per se, so that solid particles are entrained with the exit gas through an opening in the top portion of the furnace to the particle separator 42. The particle separator separates most of the hot solid particles from the exit gas and the separated solid particles are returned through the return duct 46 arranged in the lower portion of the separator to the furnace 36.

In communication with the return duct 46 is arranged a heat exchanger 10 in accordance with the invention, in the heat exchange chamber 12 of which a slow fluidized bed 14 consisting of hot solid particles is maintained by feeding fluidization gas from a wind box 16 through a grid 18. The fluidized bed is provided with heat transfer surfaces 30 to recover heat from the fluidized bed.

30

The top portion of the chamber 12 above the fluidized bed is provided - although not illustrated in Fig. 1 - with an opening or a duct, through which the fluidization air is allowed to flow from the heat exchange chamber to the furnace. Moreover, the top portion of heat exchange chamber 12 above the fluidized bed 14 is provided - as can be seen more clearly in Fig. 3 - with an inlet 44

35



communicating with the end 46' of the return duct, through which hot solid particles flow through the inlet 24 to the fluidized bed 14.

5 The bottom of the heat exchange chamber 12 is provided with an outlet 50, through which solid particles can be removed from the heat exchange chamber and passed along a duct 52 to the furnace 36. The volume of the solid particle flow to be removed through the outlet 50 can be  
10 adjusted by using a valve 56 to change the volume of the fluidization and blast air to be fed through pipes 54 to the duct 52. When the volume of the solid particle flow to be removed through the outlet 50 is less than that of the hot solid particle flow entering the heat exchange  
15 chamber, the excess of the solid particles exits from the heat exchange chamber 12 directly from the upper surface of the bed 14 through an overflow opening 58 arranged in a wall 60 of the heat exchange chamber below the inlet 24. The wall 60 is at the inlet 24 shared by the heat exchange  
20 chamber 12 and the furnace 36. The heat exchange chamber and the furnace may also be completely separate from each other not sharing a wall or wall part. In the case of Fig. 2 only the uppermost part of the wall of the heat exchange chamber is shared with the furnace. If the chambers are  
25 completely separate, it is possible to arrange a duct or a pipe between them, through which the solid particles exiting from the heat exchange chamber, can be returned to the furnace.

30 The intermediate wall 62 restricting the mixing arranged in the top portion of the heat exchange chamber 12 between the inlet 24 and the fluidized bed 14, passes the hot solid particles from the inlet toward an area 28' of the upper surface 28 of the fluidized bed 14 defined by the  
35 intermediate wall 62 and the wall 60 of the heat exchange chamber. The intermediate wall 62 and the wall 60 of the heat exchange chamber 12 form a guiding channel 66 above



the fluidized bed and partially penetrating into the fluidized bed. The intermediate wall 62 extends lower than the lower edge of the overflow opening 58 and at the guiding channel prevents the free movement of the incoming material on the surface of fluidized bed 14. On the other hand, in order to avoid a major waste space, the guiding channel 66 formed by the wall 60 of the heat exchange chamber and the intermediate wall 62 may not be too long. In the example disclosed in Fig. 1, the length of the guiding channel 62 is less than 20 % of the depth of the bed 14. The intermediate wall 62 extends over a distance "h" below the upper surface of the fluidized bed, the distance typically being 0-50 cm. An area  $A_1$  restricted by the guiding channel from the fluidized bed is at most 30 % of the average cross-sectional area A of the fluidized bed.

Part of the hot solid particles is allowed to flow from the channel 66 through the overflow opening 58 to the furnace 36 without mixing with the solid particles in the lower portion of the guiding channel, or mixing only with a substantially small amount of cooled solid particles in the area of the guiding channel. A controllable portion of the hot solid particles flow in an uncooled state directly to the furnace. In order to have as minimal mixing of the particles in the bed 14 with the hot particles exiting through the overflow opening 58 as possible, the overflow opening is located very close to the inlet in the arrangement of Fig. 2.

Since the particles exiting through the outlet 50 come much more into contact with the heat transfer surfaces 30 than the particles exiting through the overflow opening 58, the heat transfer efficiency of the heat exchanger 10 may be adjusted by changing the ratio of the particle flows exiting through the outlet 50 and the overflow opening 58 respectively. When the fluidization velocity of





the bed 14 is constant, the heat transfer efficiency is at its highest when all particles exit through the outlet 50 and at its lowest when all particles exit through the overflow opening 58.

5

In a typical case, the lowest heat transfer efficiency achieved having the discharge from the heat exchange chamber only through the overflow 58 would be in the order of 60-80 % of the maximum efficiency, if no intermediate  
10 wall 62 were provided. Owing to the intermediate wall 62, the exchange of particles in the bed 14 by using minimum efficiency is insignificant and the minimum efficiency may be as low as only 20 % of the maximum efficiency. This  
15 widening of the adjustment range is of great importance when various kind of adjustment of the heat exchanger 10 is required.

The guiding channel 66 and the overflow opening restricting the inlet flow of the hot solid particles are  
20 formed preferably in a point, from where the solid particles may be returned in a simple manner to the furnace. In the case of Fig. 2 showing the cross-section at the overflow opening, the overflow opening is intended to be arranged in the middle of the wall 60 of the heat  
25 exchanger. If desired, the guiding channel and the overflow opening may be arranged in either side of the heat exchanger or in some other suitable place, or there could be more than just one overflow opening arranged at a distance from each other.

30

In the arrangement of Fig. 4 the same reference numbers are used as in Figs. 1, 2, and 3, wherever possible.

Fig. 4 discloses a heat exchange chamber 12 of a heat  
35 exchanger 10, said heat exchange chamber being arranged outside a wall 60 in a furnace 36 of a fluidized bed reactor, circulating fluidized bed reactor or bubbling



fluidized bed reactor. A bed 14 of solid particles is fluidized by fluidization gas blown through a grid 72 from a wind box 70 and heat energy is recovered from the bed of heat transfer surfaces 30.

5

The flow of solid particles is passed through an inlet 74 to the upper surface 28 of the solid particle bed 14. The hot solid particles entering through the inlet 74 are passed by a guiding channel 78 formed by an intermediate wall 76 toward the fluidized bed, to a restricted area 28' on its upper surface. Hot solid particles exit through an overflow opening 80 provided in the area defined by the intermediate wall, the upper surface of the fluidized bed being flush with the lower edge of the overflow opening or higher.

15

A vertical lifting channel 82 is formed between the furnace 36 and the actual heat exchange chamber 12 of the heat exchanger 10. The heat exchange chamber 12 and the lifting channel 82 are in communication with each other through an outlet 84 in their respective bottom parts. The top portion of the lifting channel is provided with a second overflow opening 88 in the wall 86 shared by the lifting channel and the furnace for the removal of solid particles as an overflow from the lifting channel to the furnace.

20

25

The ratio of the volume of the solid particle flow "V" exiting through the second overflow opening 88 of the lifting channel 82 to that of the flow "v" exiting through the overflow opening 80 arranged in the top portion of the heat exchange chamber can be adjusted by a valve 90 regulating the volume of the flow exiting through the channel 82, i.e. the fluidization. Due to the intermediate wall 76 preventing the mixing, the flow exiting through the overflow opening 80 does not substantially mix with the particles in the fluidized bed 14. The solid particle

30

35



flow through the overflow opening 80 consists of hot solid particles newly flown in through the inlet 74.

5 In the above the invention has been described in connection with embodiments that are presently considered as the most preferable. However, it must be understood that the invention is not limited to these embodiments only, but it also covers a number of other arrangements within the scope of invention determined by the patent  
10 claims below.

Thus, it must be understood that the heat exchanger may also be arranged in some other way into communication with the reaction chamber, e.g. inside the reaction chamber.  
15 Thus the particle inlet may be arranged to operate in communication with the inner material circulation of the reaction chamber.

Furthermore, the number of inlets and outlets, the  
20 location and structure thereof may deviate from what is disclosed herein, and the structure and shape of the means restricting the mixing of particles may as well deviate from the embodiments disclosed herein.



## Claims

1. Method in a fluidized bed heat exchanger comprising
- a heat exchange chamber having a bed of solid
  - 5 particles;
  - means for feeding fluidization gas into the heat exchange chamber;
  - heat transfer surfaces in contact with the bed of solid
  - 10 particles;
  - an inlet arranged in the top portion of the heat exchange chamber above the upper surface of the bed of solid particles; and
  - a first outlet,
- which method comprises the following steps:
- 15 (a) solid particles are fed through the inlet to the upper surface of the bed of solid particles in the heat exchange chamber;
  - (b) the bed of solid particles in the heat exchange chamber is fluidized by fluidization gas;
  - 20 (c) heat is transferred by the heat transfer surfaces away from the fluidized bed of solid particles; and
  - (d) solid particles are removed from the heat exchange chamber through the first outlet,
  - 25 characterized in that
- in the fluidized bed heat exchanger further comprising a guiding channel extending from above the upper surface of the bed of solid particles at least to the surface of the bed of solid particles and where the first outlet is
- 30 formed in the area of said guiding channel, the method further comprises the following step:
  - (e) particles fed in step (a) through the inlet to the heat exchange chamber are passed by the guiding channel to an area defined by the guiding
  - 35 channel on the upper surface of the bed of solid particles,
- and that step (d) comprises





the removal of solid particles from the area defined by the guiding channel in the bed of solid particles,

whereby solid particles can be removed through the first  
5 outlet from the area defined by the guiding channel in the heat exchange chamber without substantially transferring any heat from the particles to the heat transfer surfaces.

2. Method according to claim 1, characterized in that in  
10 step (e) the flow of solid particles to the heat exchange chamber through the inlet is passed by the guiding channel to an area of the upper surface of the solid particle bed, the cross-sectional surface area of which is at most 30 %, preferably at most 10%, of the average cross-sectional  
15 area of the bed of solid particles.

3. Method according to claim 1, characterized in that in a fluidized bed heat exchanger in which the guiding channel is formed between an intermediate wall and the wall of the  
20 heat exchange chamber

- in step (e) the flow of solid particles to the heat exchange chamber through the inlet is passed by the guiding channel to such an area on the upper surface of the solid particle bed that is defined by the guiding  
25 channel, and that

- the intermediate wall restricts the horizontal movement of the solid particles between the guiding channel and the rest of the solid particle bed.

30 4. Method according to claim 3, characterized in that in step (d) solid particles are removed from the surface of the solid particle bed in the heat exchange chamber as an overflow.

35 5. Method according to claim 3, characterized in that in step (d) solid particles are removed from the heat



exchange chamber from below the surface of the bed of solid particles through a first adjustable outlet.

6. Method according to claim 1, characterized in that  
5 solid particles are further removed from the fluidized bed heat exchanger through a second outlet in the lower portion of the heat exchange chamber.

7. Method according to claim 1, characterized in that the  
10 heat exchange in the fluidized bed heat exchanger is adjusted by regulating the amount of solid particles passing through the second outlet.

8. Method in a fluidized bed heat exchanger according to  
15 claim 1, the inlet of which is connected to the return duct of the particle separator of a circulating fluidized bed reactor and the outlet to the furnace of a circulating fluidized bed reactor, characterized in that the solid  
20 particles flowing from the return duct to the heat exchange chamber are returned from the area defined by the guiding channel directly to the furnace of the circulating fluidized bed reactor.

9. Apparatus in a fluidized bed heat exchanger comprising  
25 - a heat exchange chamber having a bed of solid particles;  
- means for feeding fluidization gas into a heat exchange chamber for fluidizing the bed of solid particles therein;  
30 - heat transfer surfaces in contact with the bed of solid particles;  
- an inlet arranged in the top portion of the heat exchange chamber above the upper surface of the bed of solid particles for feeding solid particles to the heat  
35 exchange chamber and  
- a first outlet for removing solid particles from the heat exchange chamber,



characterized in

- the heat transfer chamber further comprising a guiding channel extending from above the upper surface of the bed of solid particles at least to the surface of the bed of solid particles for guiding the solid particles to be fed through the inlet into the heat exchange chamber toward an area defined by the guiding channel on the upper surface of the bed of solid particles,  
and
- 10 - the first outlet being formed in the area of the guiding channel, for the removal of solid particles from the area defined by the guiding channel in the bed of solid particles.
- 15 10. Apparatus according to claim 9, characterized in the area defined by the guiding channel on the upper surface of the bed of solid particles is at most 30 %, preferably at the most 10 %, of the average cross-sectional area of the bed of solid particles.
- 20 11. Apparatus according to claim 9, characterized in the area defined by the guiding channel on the upper surface of the solid particle bed is abutted on the first wall of the heat exchange chamber.
- 25 12. Apparatus according to claim 11, characterized in the first outlet comprising an overflow opening arranged flush with the surface of the bed of solid particles.
- 30 13. Apparatus according to claim 11, characterized in the first outlet comprising an adjustable outlet arranged below the surface of the bed of solid particles.
- 35 14. Apparatus according to claim 9, characterized in a second outlet being arranged in the heat exchange chamber.



15. Apparatus according to claim 14, characterized in the second outlet being arranged in the bottom of the heat exchange chamber.
- 5 16. Apparatus according to claim 14, characterized in  
- the second outlet being arranged between the heat exchange chamber and a lifting channel formed adjacent to the heat exchange chamber and  
- an overflow opening being arranged in the top portion of  
10 the lifting channel for the removal of solid particles from the lifting channel.
- 15 17. Apparatus according to claim 9, characterized in the inlet of the fluidized bed heat exchanger being connected to the return duct of the particle separator of the circulating fluidized bed reactor and the first outlet to the furnace of the fluidized bed reactor.
- 20 18. Apparatus according to claim 9, characterized in the inlet and/or the outlet of the fluidized bed heat exchanger being connected directly to the furnace of the fluidized bed reactor.
- 25 19. Apparatus according to claim 9, characterized in the guiding channel being abutted on the wall of the heat exchange chamber and on the intermediate wall arranged in the heat transfer chamber, the intermediate wall extending from above the surface of the solid particle bed at least to the surface of the bed of solid particles.
- 30 20. Apparatus according to claim 19, characterized in the intermediate wall extending from the bed of solid particles about 10 - 50 cm, preferably about 20 - 30 cm, below the surface.





21. Apparatus according to claim 19, characterized in the intermediate wall penetrating into the solid particle bed at most 20 % of the depth of the bed.
- 5 22. Apparatus according to claim 9, characterized in the second outlet being spaced apart from the vertical projection of the guiding channel in the bottom of the heat exchange chamber.
- 10 23. Apparatus according to claim 9, characterized in the heat exchange chamber being provided with a continuous bed of solid particles having a continuous fluidization.



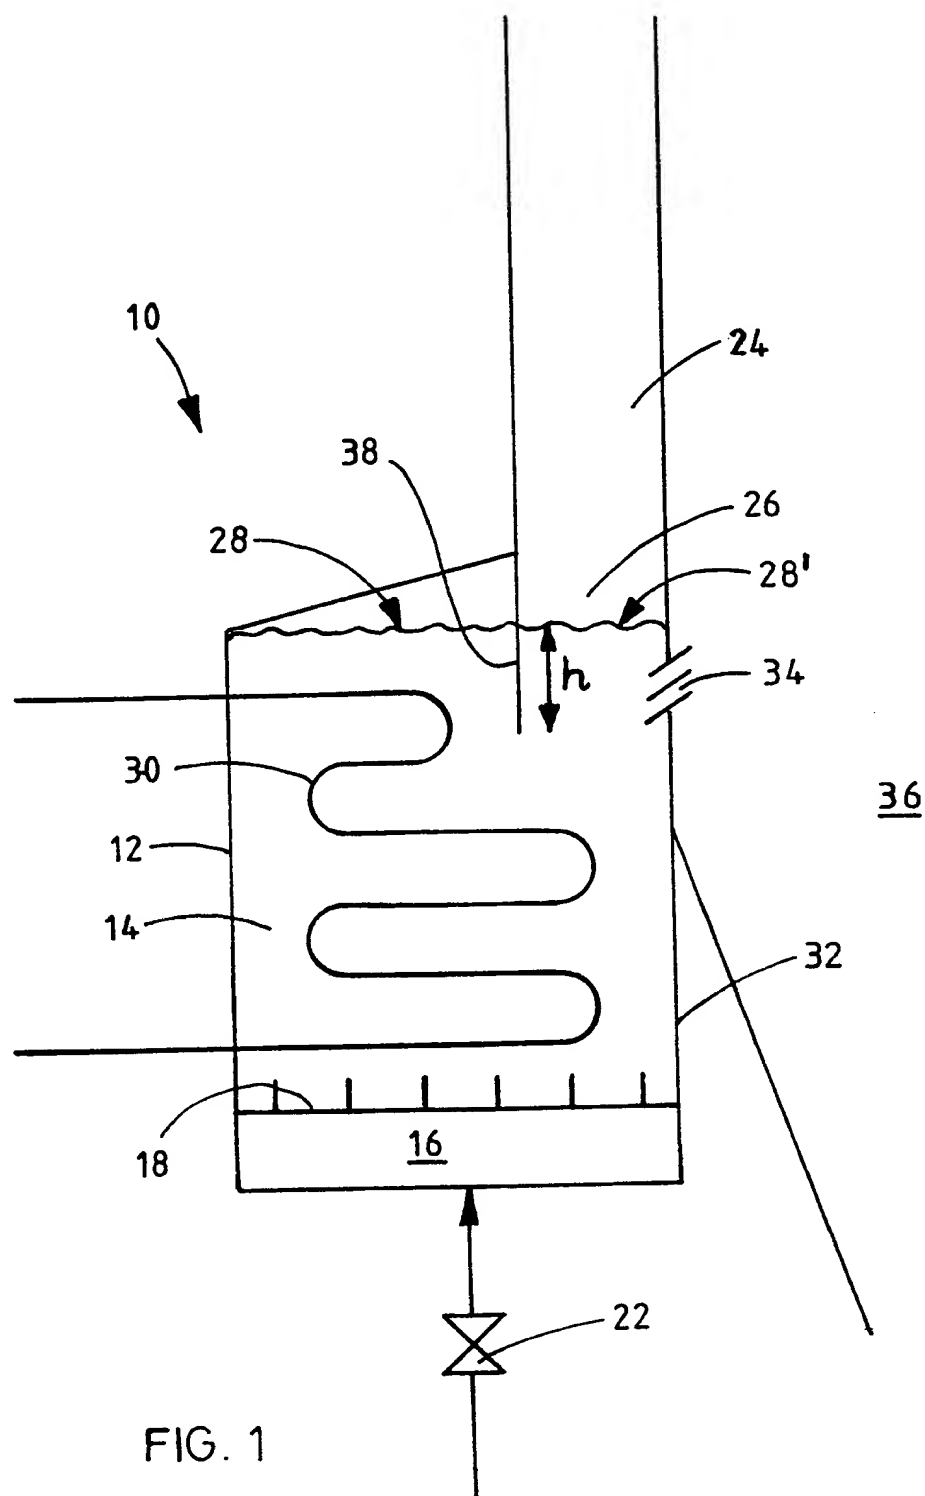


FIG. 1



2/3

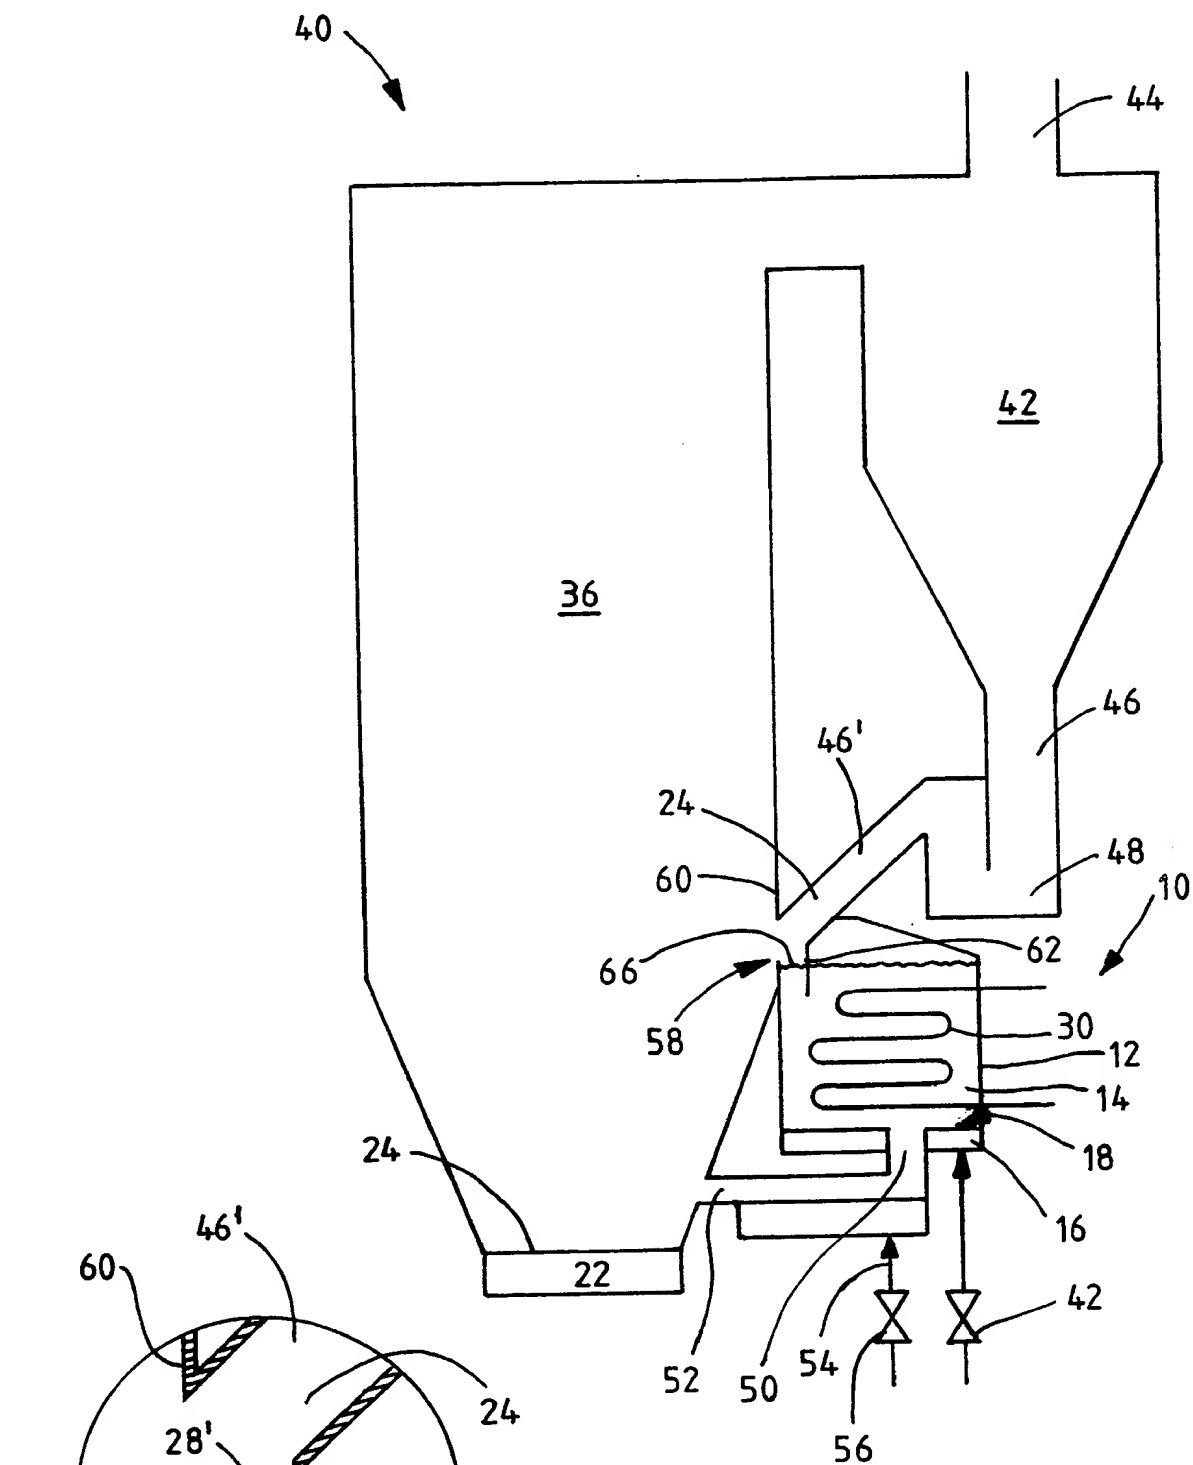


FIG. 2

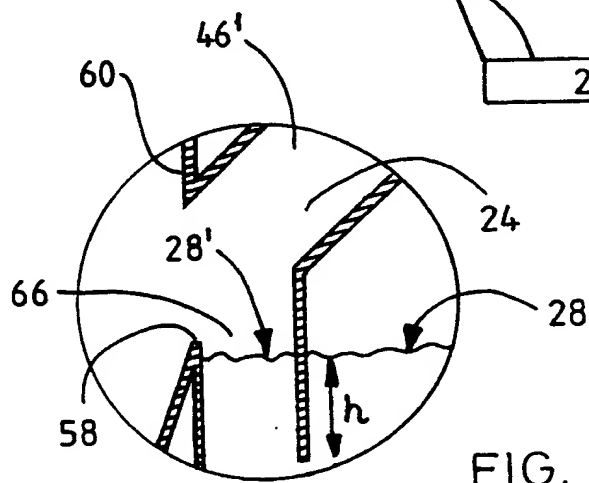


FIG. 3



3/3

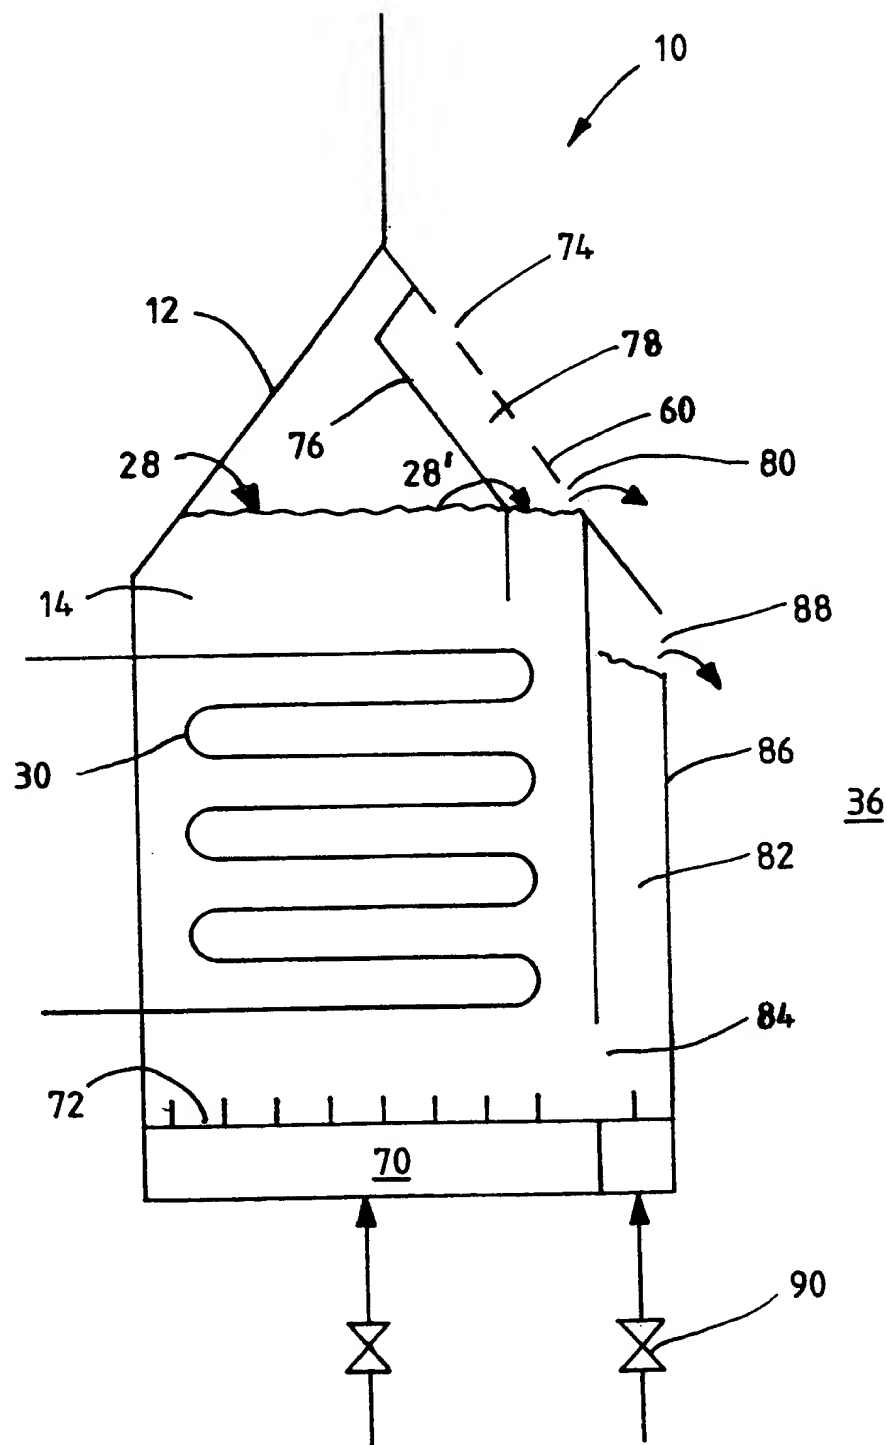


FIG. 4



1

2

3

4



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00797

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F28D 13/00 // F23C 11/02, F22B 31/00, B01J 8/24  
 According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: F23C, F22B, B01J, F28D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FI 85909 B (A. AHLSTROM CORPORAITON), 28 February 1992 (28.02.92) --	
A	FI 102316 B (FOSTER WHEELER ENERGIA OY), 13 November 1998 (13.11.98) --	
A	DE 3726643 A1 (VEB BERGMANN-BORSIG, STAMMBETRIEB DES VEB KOMBINATES KRAFTWERKSANLAGENBAU), 11 May 1988 (11.05.88) --	
A	EP 0199655 A1 (CHARBONNAGES DE FRANCE), 29 October 1986 (29.10.86) --	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 January 2000

Date of mailing of the international search report

02 -02- 2000

Name and mailing address of the ISA/  
 Swedish Patent Office  
 Box 5055, S-102 42 STOCKHOLM  
 Facsimile No. +46 8 666 02 86

Authorized officer

Annette Riedel / JA A  
 Telephone No. +46 8 782 25 00



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00797

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0325042 A1 (FOSTER WHEELER ENERGY CORPORATION), 26 July 1989 (26.07.89)  --	
A	EP 0365723 A1 (FOSTER WHEELER ENERGY CORPORATION), 2 May 1990 (02.05.90)  -- -----	



INTERNATIONAL SEARCH REPORT  
Information on patent family members

02/12/99

International application No.

PCT/FI 99/00797

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
FI	85909	B	28/02/92	AT	80908 T	15/10/92
				DE	6900032 U	29/10/92
				EP	0384454 A,B	29/08/90
				SE	0384454 T3	
				FI	890833 A	23/08/90
				JP	1963951 C	25/08/95
				JP	2290406 A	30/11/90
				JP	6097082 B	30/11/94
				US	4969930 A	13/11/90
FI	102316	B	13/11/98	AU	3034597 A	05/01/98
				CA	2256893 A	11/12/97
				CN	1221482 A	30/06/99
				EP	0901597 A	17/03/99
				FI	962332 A	06/12/97
				PL	330293 A	10/05/99
				WO	9746829 A	11/12/97
DE	3726643	A1	11/05/88	NONE		
EP	0199655	A1	29/10/86	SE	0199655 T3	
				AT	38428 T	15/11/88
				AU	591665 B	14/12/89
				AU	5655386 A	30/10/86
				CN	1008771 B	11/07/90
				DE	3661110 A	08/12/88
				FR	2581173 A,B	31/10/86
				IN	166939 A	11/08/90
				JP	61250489 A	07/11/86
				US	4796691 A	10/01/89
EP	0325042	A1	26/07/89	SE	0325042 T3	
				CA	1329338 A	10/05/94
				JP	1217194 A	30/08/89
				JP	2032581 C	19/03/96
				JP	7031021 B	10/04/95
				US	5108712 A	28/04/92
				US	5141708 A	25/08/92
				US	5184671 A	09/02/93
EP	0365723	A1	02/05/90	US	4896717 A	30/01/90



7  
1  
3



# PATENT COOPERATION TREATY

RECEIVED

08 AUG 2000

TURUN  
PATENTTITOIMISTO OY

From the:  
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

RECEIVED

4.08.00

FOSTER WHEELER ENERGIA OY  
Patent Department

PCT

WRITTEN OPINION

(PCT Rule 66)

To:

TURUN PATENTTITOIMISTO OY  
P.O. Box 99  
FIN-20521 Turku  
FINLANDE

*KAUKO*

Date of mailing  
(day/month/year)

04.08.2000

Applicant's or agent's file reference

P8030/P3013

*Hyytiäinen*

REPLY DUE

within 3 month(s)

from the above date of mailing

*4.11.00/JS*

International application No.

PCT/FI99/00797

International filing date (day/month/year)

29/09/1999

Priority date (day/month/year)

02/10/1998

International Patent Classification (IPC) or both national classification and IPC

F28D13/00

Applicant

FOSTER WHEELER ENERGIA OY

1. This written opinion is the **first** drawn up by this International Preliminary Examining Authority.

2. This opinion contains indications relating to the following items:

- I ☒ Basis of the opinion
- II ☐ Priority
- III ☒ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain document cited
- VII ☒ Certain defects in the international application
- VIII ☒ Certain observations on the international application

3. The applicant is hereby **invited to reply** to this opinion.

**When?** See the time limit indicated above. The applicant may, before the expiration of that time limit, request this Authority to grant an extension, see Rule 66.2(d).

**How?** By submitting a written reply, accompanied, where appropriate, by amendments, according to Rule 66.3. For the form and the language of the amendments, see Rules 66.8 and 66.9.

**Also:** For an additional opportunity to submit amendments, see Rule 66.4.  
For the examiner's obligation to consider amendments and/or arguments, see Rule 66.4 bis.  
For an informal communication with the examiner, see Rule 66.6.

If no reply is filed, the international preliminary examination report will be established on the basis of this opinion.

4. The final date by which the international preliminary examination report must be established according to Rule 69.2 is: 02/02/2001.

Name and mailing address of the international preliminary examining authority:



European Patent Office  
D-80298 Munich  
Tel. +49 89 2399 - 0 Tx: 523656 epmu d  
Fax: +49 89 2399 - 4465

Authorized officer / Examiner

Colas, R

Formalities officer (incl. extension of time limits)

Goenechea Olmos, A

Telephone No. +49 89 2399 2664



## WRITTEN OPINION

International application No. PCT/FI99/00797

### I. Basis of the opinion

1. This opinion has been drawn on the basis of *(substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this opinion as "originally filed".)*:

#### Description, pages:

1-21 as published

#### Claims, No.:

1-23 as published

#### Drawings, sheets:

1/3-3/3 as published

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:
- ☐ the drawings, sheets:

3. This opinion has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

### III. Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

The questions whether the claimed invention appears to be novel, to involve an inventive step (to be non-obvious), or to be industrially applicable have not been and will not be examined in respect of:

- ☐ the entire international application,
- ☒ claims Nos. 1-8,

because:

- ☐ the said international application, or the said claims Nos. relate to the following subject matter which does not require an international preliminary examination (*specify*):



## WRITTEN OPINION

International application No. PCT/FI99/00797

- ☒ the description, claims or drawings (*indicate particular elements below*) or said claims Nos. 1-8 are so unclear that no meaningful opinion could be formed (*specify*):  
**see separate sheet**
- ☐ the claims, or said claims Nos. are so inadequately supported by the description that no meaningful opinion could be formed.
- ☐ no international search report has been established for the said claims Nos. .

### V. Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

#### 1. Statement

Novelty (N)	Claims
Inventive step (IS)	Claims
Industrial applicability (IA)	Claims

#### 2. Citations and explanations

**see separate sheet**

### VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:

**see separate sheet**

### VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:

**see separate sheet**

**Re Item III**

**Non-establishment of opinion with regard to novelty, inventive step and industrial applicability**

- 1 Having regard to the objection of clarity as set out in point 11 of the present opinion under item VIII, a statement concerning novelty and inventive step appears not useful.

**Re Item V**

**Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

- 2 Document DE 37 26 643 A (see especially the figures) discloses a fluidized bed heat exchanger 3 comprising
  - a heat exchange chamber having a bed of solid particles;
  - means 5 for feeding fluidization gas into a heat exchange chamber for fluidizing the bed of solid particles therein;
  - heat transfer surfaces 6.2 in contact with the bed of solid particles;
  - an inlet 11 arranged in the top portion of the heat exchange chamber 3 above the upper surface of the bed of solid particles for feeding solid particles to the heat exchange chamber and
  - a (first) outlet 10 for removing solid particles from the heat exchange chamber, whereby
  - the inlet forms a guiding channel 11 extending from above the upper surface of the bed of solid particles at least to the surface of the bed of solid particles for guiding the solid particles to be fed through the inlet into the heat exchange chamber toward an area defined by the guiding channel on the upper surface of the bed of solid particles.
- 3 Therefore, as far as claim 9 can be understood (see point 13 under item VIII), the subject-matter of claim 9 differs from this known heat exchanger in that the (first) outlet is formed in the area of the guiding channel, for the removal of solid particles from the area defined by the guiding channel in the bed of solid particles. ok
- 4 This feature allows an easy adjustment of the heat transfer efficiency of the fluidized bed heat exchanger within a wide efficiency range. Due to the outlet in

the area defined by the guiding channel, it is possible to remove hot solid particles directly from this area, without allowing the particles to be removed to come into contact with the cooled solid particles.

- 5 This basic idea cannot be found in the documents quoted in the search report, where the outlet is located away from the input channel. Therefore, a clearly drafted claim having regard to Article 6 PCT and having the main features of actual claim 9 would meet the requirements of Article 33(3) PCT.

**Re Item VII**

**Certain defects in the international application**

- 6 To increase their intelligibility, reference signs should be inserted in parentheses in the claims in accordance with Rule 6.2.b PCT.
- 7 To meet the requirements of Rule 5.1a ii PCT, the document DE 37 26 643 A should be identified in the description and the relevant background art therein is to be indicated.
- 8 The independent claim should be correctly delimited against the prior art.

**Re Item VIII**

**Certain observations on the international application**

- 9 Claim 1 lacks clarity as the claim relates to a method. The wording of the claim "*Method in a fluidized bed heat exchange*" is however so that it is not apparent what for a method should be disclosed in the claim.
- 10 Further the only clear method step is that heat is transferred (feature (c) of the claim) so that it appears that the claim could concern a method for transferring heat. This heat transfer feature is, however, common in a heat exchanger.
- 11 The other features relates to constructional features of the apparatus according to the apparatus claim 9 or represents the way where the apparatus is working.

**WRITTEN OPINION  
SEPARATE SHEET**

International application No. PCT/FI99/00797

Further, the features of the claim can only be carried out in an apparatus according to the apparatus claim 9. Therefore the claim does not represent a clear method claim, but rather the instruction for use of the apparatus according to claim 9. Such instructions for use belongs however only in the description, and not in a claim.

Claim 1 and the depending claims 2-8 lack therefore clarity (Article 6 PCT).

- 12 The wording "Apparatus *in* a fluidized bed heat exchanger" of claim 9 is also unclear. Indeed it is not apparent which apparatus is disclosed. It seems rather that the claim relates to "a fluidized bed heat exchanger".  
It is also unclear if the guiding channel is a further part of the heat exchanger or if it is part of the inlet. According to the description it appears that the guiding channel is in fact build up by the inlet tube as in the prior art. sh
- 13 Therefore, claim 9 lacks clarity and does not meet the requirement of Article 6 PCT. For the purpose of the present opinion the claim has been interpreted as disclosing a fluidized bed heat exchanger with an inlet forming the guiding channel. ok
- 14 Claims 17-19 lack clarity as the claim do not only describe a heat exchanger per se, but also refers also to features of the furnace. It seems that these claims have to be directed to a furnace comprising a heat exchanger. hmm

Therefore, the claim does not meet the requirement of Article 6 PCT.

04 JAN 2001

From the  
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITYTURUN  
PATENTTITOIMISTO OY

To:

TURUN PATENTTITOIMISTO OY  
P.O. Box 99  
FIN-20521 Turku  
FINLANDE

PCT

NOTIFICATION OF TRANSMITTAL OF  
THE INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT  
(PCT Rule 71.1)Date of mailing  
(day/month/year) 02.01.2001Applicant's or agent's file reference  
P8030/P3013

## IMPORTANT NOTIFICATION

International application No.  
PCT/FI99/00797International filing date (day/month/year)  
29/09/1999Priority date (day/month/year)  
02/10/1998Applicant  
FOSTER WHEELER ENERGIA OY

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

## 4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/

European Patent Office  
D-80298 Munich  
Tel. +49 89 2399 - 0 Tx: 523656 epmu d  
Fax: +49 89 2399 - 4465

Authorized officer

Haase, G

Tel. +49 89 2399-7532




# PATENT COOPERATION TREATY

## PCT

### INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference P8030/P3013		<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/FI99/00797	International filing date (day/month/year) 29/09/1999	Priority date (day/month/year) 02/10/1998	
International Patent Classification (IPC) or national classification and IPC F28D13/00			
Applicant FOSTER WHEELER ENERGIA OY			
<p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of 5 sheets, including this cover sheet.</p> <p><input checked="" type="checkbox"/> This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of 9 sheets.</p>			
<p>3. This report contains indications relating to the following items:</p> <ul style="list-style-type: none"> <li>I <input checked="" type="checkbox"/> Basis of the report</li> <li>II <input type="checkbox"/> Priority</li> <li>III <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</li> <li>IV <input type="checkbox"/> Lack of unity of invention</li> <li>V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement</li> <li>VI <input type="checkbox"/> Certain documents cited</li> <li>VII <input type="checkbox"/> Certain defects in the international application</li> <li>VIII <input checked="" type="checkbox"/> Certain observations on the international application</li> </ul>			
Date of submission of the demand  10/04/2000		Date of completion of this report  02.01.2001	
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465		Authorized officer  Colas, R  Telephone No. +49 89 2399 2757	



# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/FI99/00797

## I. Basis of the report

1. This report has been drawn on the basis of *(substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments (Rules 70.16 and 70.17).):*

### Description, pages:

1-3,6-15,17-21	as published			
4,5,16	as received on	06/11/2000	with letter of	02/11/2000

### Claims, No.:

1-23	as received on	06/11/2000	with letter of	02/11/2000
------	----------------	------------	----------------	------------

### Drawings, sheets:

1/3,3/3	as published			
2/3	as received on	06/11/2000	with letter of	02/11/2000

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/FI99/00797

4. The amendments have resulted in the cancellation of:

- ☐ the description,      pages:
- ☐ the claims,      Nos.:
- ☐ the drawings,      sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

1. Statement

Novelty (N)	Yes:	Claims	1-23
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-23
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-23
	No:	Claims	

2. Citations and explanations  
**see separate sheet**

**VIII. Certain observations on the international application**

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:  
**see separate sheet**



**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/FI99/00797

**Re Item V**

**Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

1. Document DE 37 26 643 A (see especially the figures) discloses a fluidized bed heat exchanger 3 comprising
  - a heat exchange chamber having a bed of solid particles;
  - means 5 for feeding fluidization gas into a heat exchange chamber for fluidizing the bed of solid particles therein;
  - heat transfer surfaces 6.2 in contact with the bed of solid particles;
  - an inlet 11 arranged in the top portion of the heat exchange chamber 3 for feeding solid particles to the heat exchange chamber;
  - a guiding channel 11 extending from above the upper surface of the bed of solid particles at least to the surface of the bed of solid particles, for guiding solid particles from the inlet to an area defined by the guiding channel on the upper surface of the bed of solid particles;
  - a first outlet 10 for removing solid particles from the heat exchange chamber.
2. The subject-matter of claim 9 differs from this known heat exchanger in that the first outlet is formed in the area of the guiding channel, for the removal of solid particles from the bed of solid particles in the area defined by the guiding channel.
3. This feature allows an easy adjustment of the heat transfer efficiency of the fluidized bed heat exchanger within a wide efficiency range. Due to the outlet in the area defined by the guiding channel, it is possible to remove hot solid particles directly from this area, without allowing the particles to be removed to come into contact with the cooled solid particles.
4. This basic idea cannot be found in the documents quoted in the search report, where the outlet is located away from the input channel. Therefore, claim 9 does meet the requirements of Article 33(3) PCT.
5. The dependent claims 10-23 disclose further embodiments of the subject-matter of the independent claim and fulfill as such also the criteria of novelty and inventive step.

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/FI99/00797

6. The same argumentation applies to the method claims 1-8, which disclose the same features in an unclear manner (cf point VIII below).

**Re Item VIII**

**Certain observations on the international application**

7. Claim 1 concerns a method for controlling heat transfer in a fluidized bed heat exchanger. However, the sole clear step or feature for a heat transfer are the features (c) of the claim, i.e. the fact that heat is transferred by heat transfer surfaces away from the fluidized bed of solid particles. The other features relates to constructional features of the apparatus according to the apparatus claim 9 or represents the way where the apparatus is working. Further, the features of the claim can only be carried out in an apparatus according to the apparatus claim 9. Therefore the claim does not represent a clear method claim, but rather the instruction for use of the heat exchanger according to claim 9. Such instructions for use belongs however only in the description, and not in a claim.

Claim 1, and, consequently, dependent claims 2-8 lack therefore clarity (Article 6 PCT).

passed directly from the inlet of the heat exchange chamber to the outlet without mixing with the particles in chamber. DE3726643 shows a fluidbed heat exchanger into which bottom particles are fed for contacting heat transfer surfaces before being discharged from its top.

US patent 5,425,412 discloses an arrangement in a circulating fluidized bed reactor, in which the heat exchange chamber includes separate areas for transferring particles and for heat transfer respectively. Heat transfer efficiency is adjusted by changing the moving intensity of the particles close to the heat transfer surfaces and the mixing rate of the material by utilizing the fluidization gas velocities of different areas. By changing the mixing rate of the material the relation between the hot particles newly flown to the chamber and the particles already cooled in the exiting particle flow is varied. In different situations particles may be discharged through an overflow opening in the bed surface and/or through an outlet in the lower portion of the chamber. The adjustment range of the heat transfer efficiency in this kind of a heat exchange chamber may, however, remain rather limited, as in order to avoid agglomeration and overheating of the bed due to possible after-burning the bed of solid particles must be maintained continuously fluidized, whereby the mixing rate is always fairly high. Further, due to the use of a separate transfer area the space utilization is not optimal, since a considerable part of the heat exchange chamber is not in efficient use with respect to the heat transfer.

It is an object of the present invention to provide an improved method and apparatus, in which the above-mentioned problems and defects of the prior art methods and apparatuses are minimized.

It is a more specific object of the invention to provide an improved method and apparatus for easy adjustment of the heat transfer efficiency of a fluidized bed heat exchanger within a wide efficiency range.

- 5 It is still a further object of the present invention to provide a durable and simple, cost-reasonable and space-saving fluidized bed heat exchanger.

10 Toward the fulfillment of these objects, the method and apparatus in accordance with the present invention is characterized by what is disclosed below in the characterizing parts of the independent claims.

The basic idea of the method and apparatus in accordance with the present invention is to be able to restrict the  
15 mixing of hot solid particles flowing into the fluidized bed heat exchanger with the bed of solid particles consisting of the solid particles that have come into contact with heat transfer surfaces and/or have otherwise been already cooled. The purpose is thus to be able to  
20 either partly or even completely prevent the mixing of hot solid particles with the bed of solid particles.

The mixing of hot solid particles with the bed of solid particles is restricted by a guiding channel arranged in  
25 the fluidized bed heat exchanger to extend from above the surface of the bed of solid particles to the bed of solid particles, and by arranging a first outlet in the area defined by said guiding channel. Hot particles fed through an inlet into the heat exchange chamber may thus be passed  
30 by the guiding channel to a particular area substantially defined by the guiding channel on the upper surface of the bed of solid particles. Moreover, when the first outlet of the heat exchange chamber is arranged in the area defined by the guiding channel, it is possible to remove hot solid  
35 particles directly from this area, for example, as an overflow from the upper surface of the solid particle bed or from below the surface through an adjustable outlet or

wider, which is of great importance in many applications of heat exchange chambers.

Fig. 2 illustrates a heat exchanger connected to a circulating fluidized bed boiler in accordance with the invention. In Fig. 2 the same reference numbers are used, as in Fig. 1, wherever possible.

Fig. 2 thus illustrates a circulating fluidized bed boiler 40, comprising a furnace 36, a particle separator 42, a gas outlet pipe 44, and a return duct 46 for solid particles including a gas lock 48. A fast fluidized bed comprising hot solid particles is maintained in the furnace 36 by feeding fluidization gas to the bed from a wind box in a manner known per se, so that solid particles are entrained with the exit gas through an opening in the top portion of the furnace to the particle separator 42. The particle separator separates most of the hot solid particles from the exit gas and the separated solid particles are returned through the return duct 46 arranged in the lower portion of the separator to the furnace 36.

In communication with the return duct 46 is arranged a heat exchanger 10 in accordance with the invention, in the heat exchange chamber 12 of which a slow fluidized bed 14 consisting of hot solid particles is maintained by feeding fluidization gas from a wind box 16 through a grid 18. The fluidized bed is provided with heat transfer surfaces 30 to recover heat from the fluidized bed.

The top portion of the chamber 12 above the fluidized bed is provided - although not illustrated in Fig. 1 - with an opening or a duct, through which the fluidization air is allowed to flow from the heat exchange chamber to the furnace. Moreover, the top portion of heat exchange chamber 12 above the fluidized bed 14 is provided - as can be seen more clearly in Fig. 3 - with an inlet 24

## Claims

1. Method of controlling heat transfer in a fluidized bed heat exchanger (10), having a heat exchange chamber (12) with a bed (14) of solid particles therein, the method comprising the following steps:

- (a) feeding solid particles through an inlet (24, 74) in the top portion of the heat exchange chamber to the upper surface (28) of the bed of solid particles therein, thereby passing the solid particles by a guiding channel (26, 66, 78) to an area (28'), defined by said guiding channel, of said upper surface;
- (b) fluidizing the bed of solid particles in the heat exchange chamber by fluidization gas;
- (c) transferring heat by heat transfer surfaces (30) away from the fluidized bed of solid particles; and
- (d) removing solid particles from the heat exchange chamber,
- characterized by
- in step (d) removing solid particles from the heat exchange chamber through a first outlet (34, 58, 80) formed in the area of the guiding channel.

25

2. A method according to claim 1, characterized by feeding solid particles to the heat exchange chamber to an area (28') of the upper surface of the bed of solid particles, the cross-sectional surface area of which is at most 30 %, preferably at most 10%, of the average cross-sectional area of the bed of solid particles.

30

3. A method according to claim 1, characterized by restricting with an intermediate wall (38, 62, 76), which forms one wall of the guiding channel and which is inserted in the bed of solid particles, the horizontal

35

movement of solid particles between the guiding channel and the rest of the of the solid particle bed.

4. A method according to claim 1, characterized by  
5 removing solid particles from the heat exchanger by overflow from the surface of the bed of solid particles in the heat exchange chamber.
5. A method according to claim 1, characterized by  
10 removing solid particles from the heat exchanger from below the surface of the bed of solid particles in the heat exchange chamber through a first adjustable outlet.
6. A method according to claim 1, characterized by  
15 removing further solid particles from the heat exchanger through a second outlet (50, 84) in the lower portion of the heat exchange chamber.
7. A method according to claim 6, characterized by  
20 adjusting the heat exchange in the heat exchanger by regulating the amount of solid particles passing through the second outlet.
8. A method according to claim 1, for controlling heat  
25 transfer in a fluidized bed heat exchanger in a circulating fluidized bed reactor, the heat exchanger having the inlet (24) connected to a return duct (46) of a particle separator (42) of the circulating fluidized bed reactor and the outlet (58) to a furnace (36) of the  
30 circulating fluidized bed reactor, characterized by returning solid particles flowing from the return duct (46) to the heat exchange chamber (12) directly from the area (28') defined by the guiding channel (66) to the furnace (36) of the circulating fluidized bed reactor.  
35
9. A fluidized bed heat exchanger (10) comprising

- a heat exchange chamber (12) having a bed (14) of solid particles therein;
  - means (16,18) for feeding fluidization gas into the heat exchange chamber for fluidizing the bed of solid particles therein;
  - heat transfer surfaces (30) in contact with the bed of solid particles in the heat exchange chamber;
  - an inlet (24, 74) arranged in the top portion of the heat exchange chamber, for feeding solid particles to the heat exchange chamber;
  - a guiding channel (26, 66, 78) extending from above the upper surface (28) of the bed of solid particles at least to the surface (28) of said bed of solid particles, for guiding solid particles from said inlet (24, 74) to an area (28') defined by the guiding channel on the upper surface of the bed of solid particles and
  - a first outlet (34, 58, 80), for removing solid particles from the heat exchange chamber, characterized in
  - the first outlet (34, 58, 80) being formed in the area of the guiding channel (26, 66, 78), for the removal of solid particles from the bed of solid particles in the area defined by the guiding channel.
10. A fluidized bed heat exchanger according to claim 9, characterized by the area (28') defined by the guiding channel on the upper surface of the bed of solid particles being at most 30 %, preferably at the most 10 %, of the average cross-sectional area of the bed of solid particles.
11. A fluidized bed heat exchanger according to claim 9, characterized by the area (28') defined by the guiding channel on the upper surface of the solid particle bed being abutted on a first wall (32) of the heat exchange chamber.



12. A fluidized bed heat exchanger according to claim 11, characterized by the first outlet (58, 80) comprising an overflow opening arranged flush with the surface of the bed of solid particles.

5

13. A fluidized bed heat exchanger according to claim 11, characterized by the first outlet (34) comprising an adjustable outlet arranged below the surface of the bed of solid particles.

10

14. A fluidized bed heat exchanger according to claim 9, characterized by a second outlet (50, 84) being arranged in the heat exchange chamber.

15

15. A fluidized bed heat exchanger according to claim 14, characterized by the second outlet (50) being arranged in the bottom of the heat exchange chamber.

20

16. A fluidized bed heat exchanger according to claim 14, characterized in

- the second outlet (84) being arranged between the heat exchange chamber and a lifting channel (82) formed adjacent to the heat exchange chamber and

25

- an overflow opening (88) being arranged in the top portion of the lifting channel for the removal of solid particles from the lifting channel.

30

17. A fluidized bed heat exchanger according to claim 9, characterized by the guiding channel (26, 66, 78) being abutted on the wall (32) of the heat exchange chamber and on an intermediate wall (38, 62, 76) arranged in the heat exchange chamber, the intermediate wall (38, 62, 76) extending from above the surface (28) of the solid particle bed at least to the surface of the bed of solid particles.

35

18. A fluidized bed heat exchanger according to claim 17,  
characterized by the intermediate wall (38, 62, 76)  
extending from the surface of the bed of solid particles  
about 10 - 50 cm, preferably about 20 - 30 cm, below the  
5 surface.

19. A fluidized bed heat exchanger according to claim 17,  
characterized by the intermediate wall (38, 62, 76)  
penetrating into the solid particle bed at most 20 % of  
10 the depth of the bed.

20. A fluidized bed heat exchanger according to claim 9,  
characterized in a second outlet (50) being spaced apart  
from the vertical projection of the guiding channel in the  
15 bottom of the heat exchange chamber.

21. A fluidized bed heat exchanger according to claim 9,  
characterized in the heat exchange chamber being provided  
with a continuous bed of solid particles having a  
20 continuous fluidization.

22. A circulating fluidized bed reactor having a fluidized  
bed heat exchanger according to claim 9, characterized by  
the inlet (24) of the fluidized bed heat exchanger being  
25 connected to a return duct (46) of a particle separator  
(42) of the circulating fluidized bed reactor and the  
first outlet (34,58) to a furnace (36) of the circulating  
fluidized bed reactor.

30 23. A fluidized bed reactor having a fluidized bed heat  
exchanger according to claim 9, characterized by the inlet  
(74) of the fluidized bed heat exchanger being connected  
directly to the furnace (36) of the fluidized bed reactor.

2/3

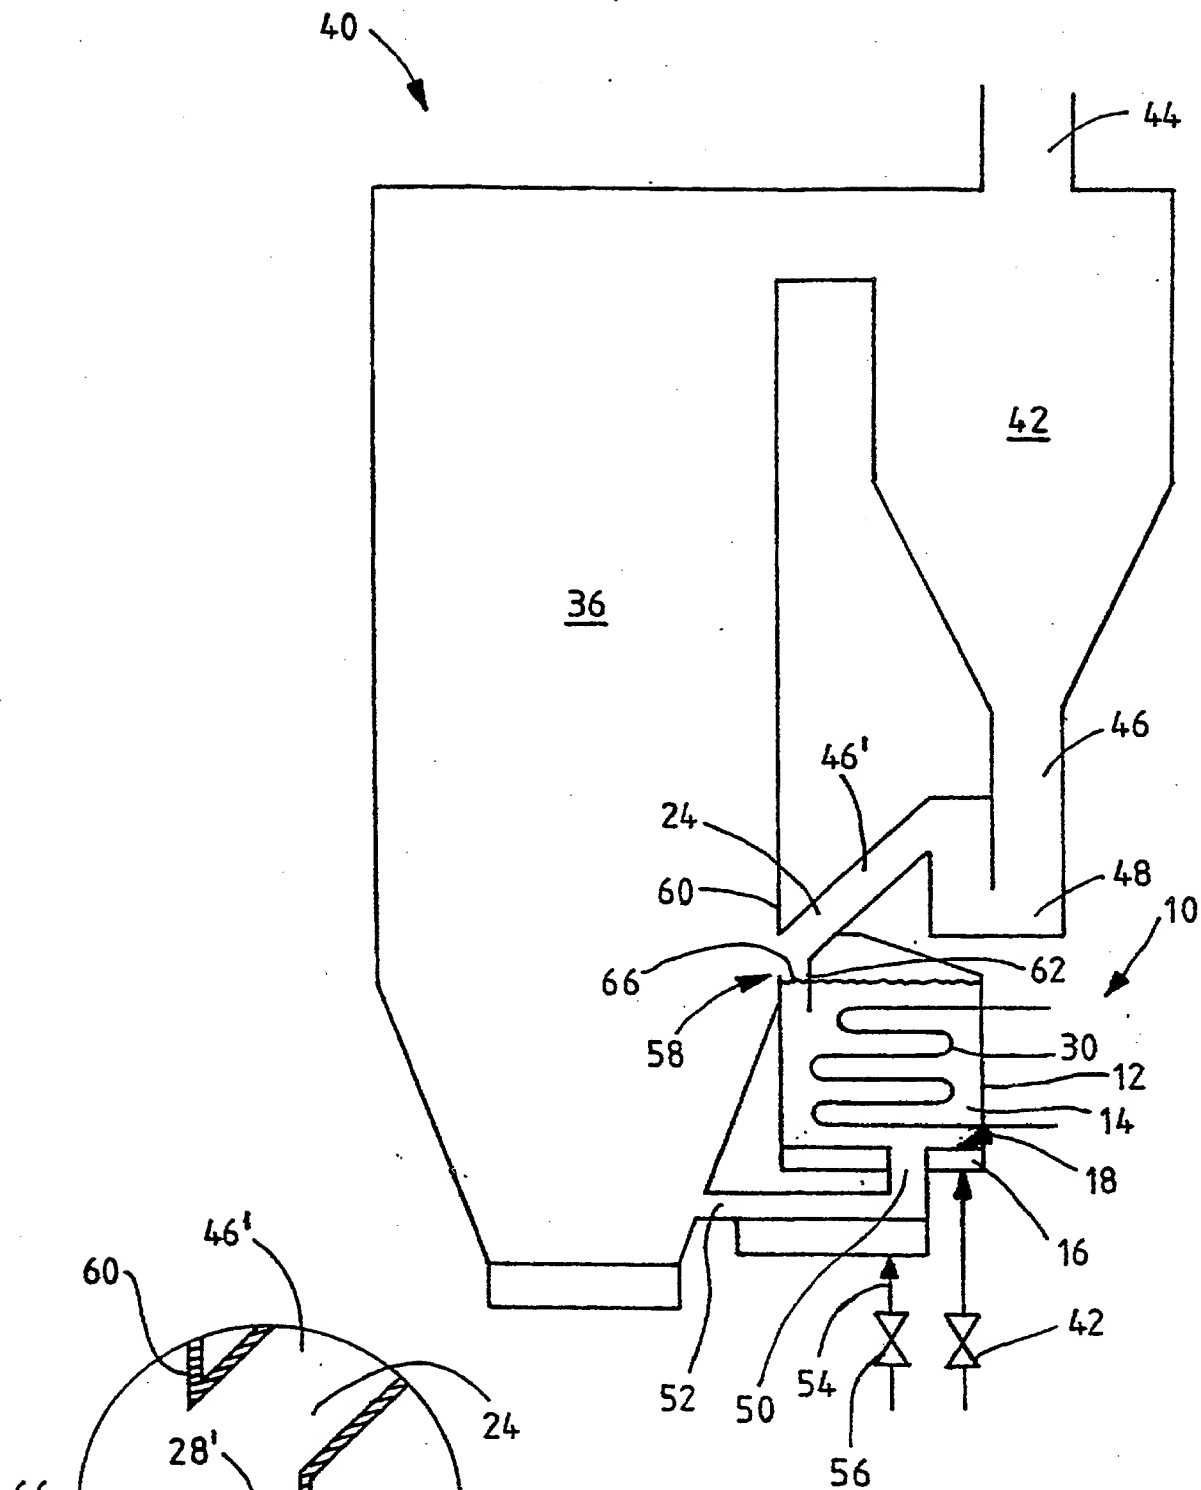


FIG. 2

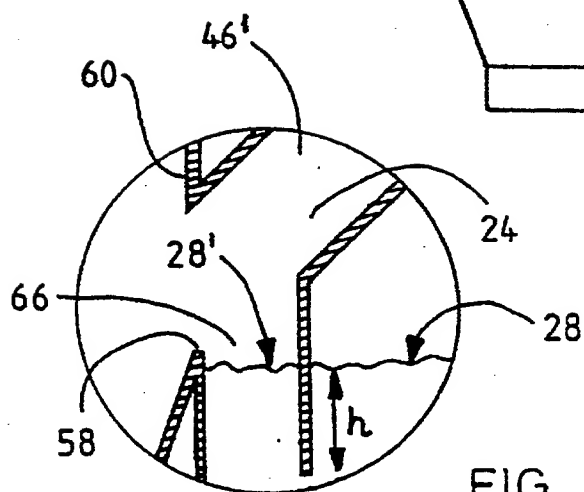


FIG. 3

AMENDED SHEET

